
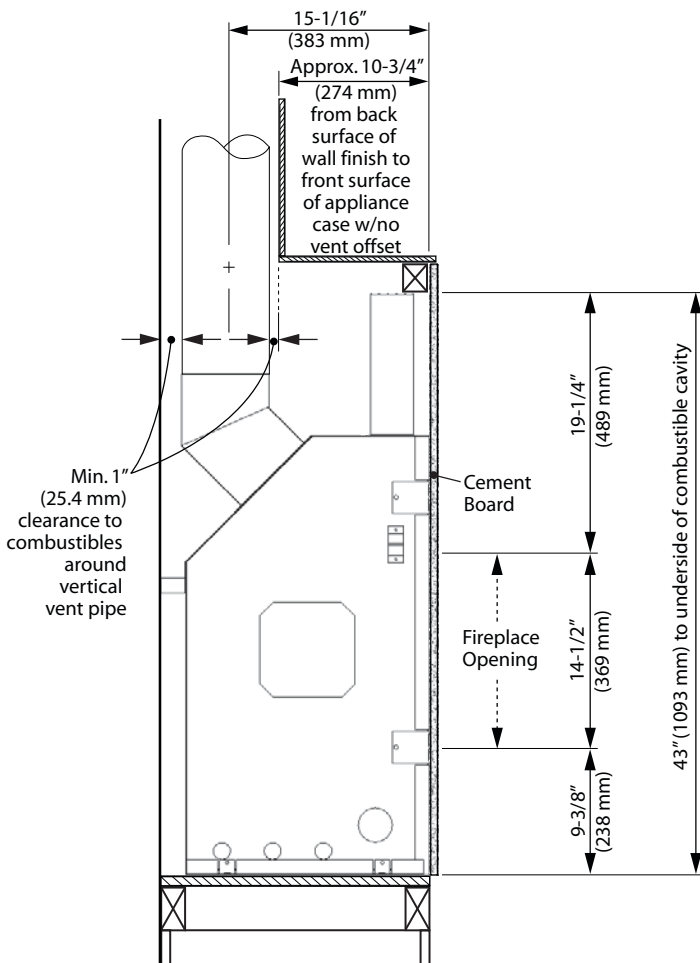


## Framing Dimensions


NOTE: Height of cavity may be affected by vent configuration

1/2" thick cement board required above, on each side and below engine opening (supplied w/engine)


**NOTE: This unit requires a solid platform to support it.** Combustible framing allowed beneath fireplace. When the appliance is installed directly on carpeting, tile or other combustible material other than wood flooring, the appliance shall be installed on a metal or wood panel extending the full width and recessed depth of the appliance

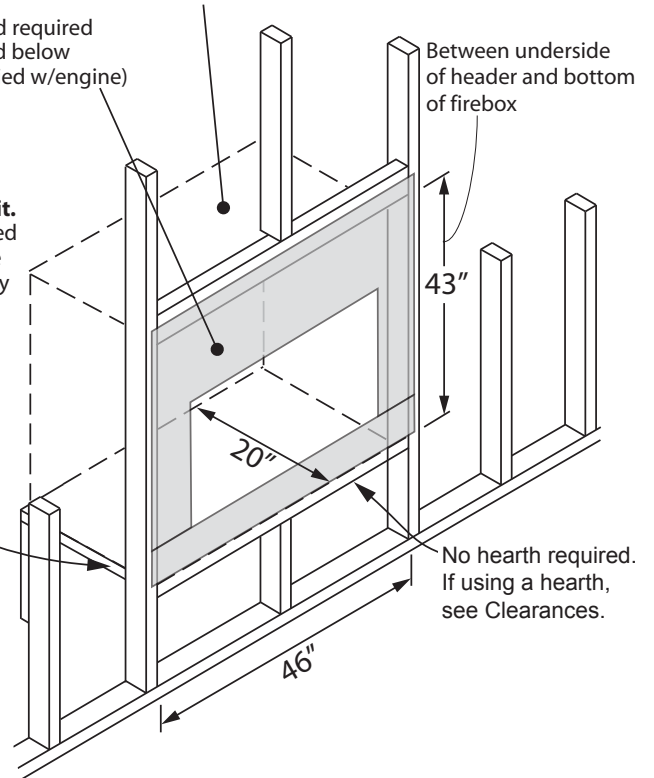

## Framing with Partial Shelf—Top Outlet

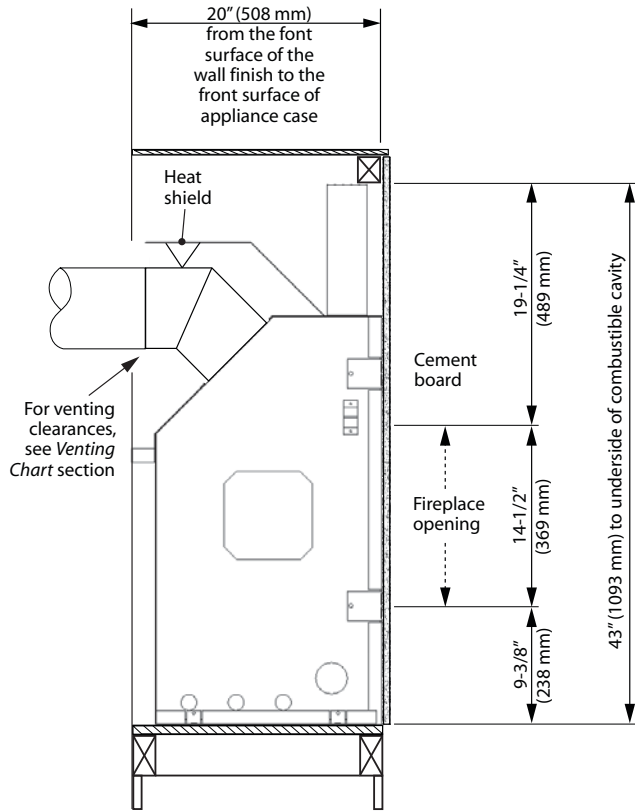

**Framing with Full Shelf—Rear Outlet**

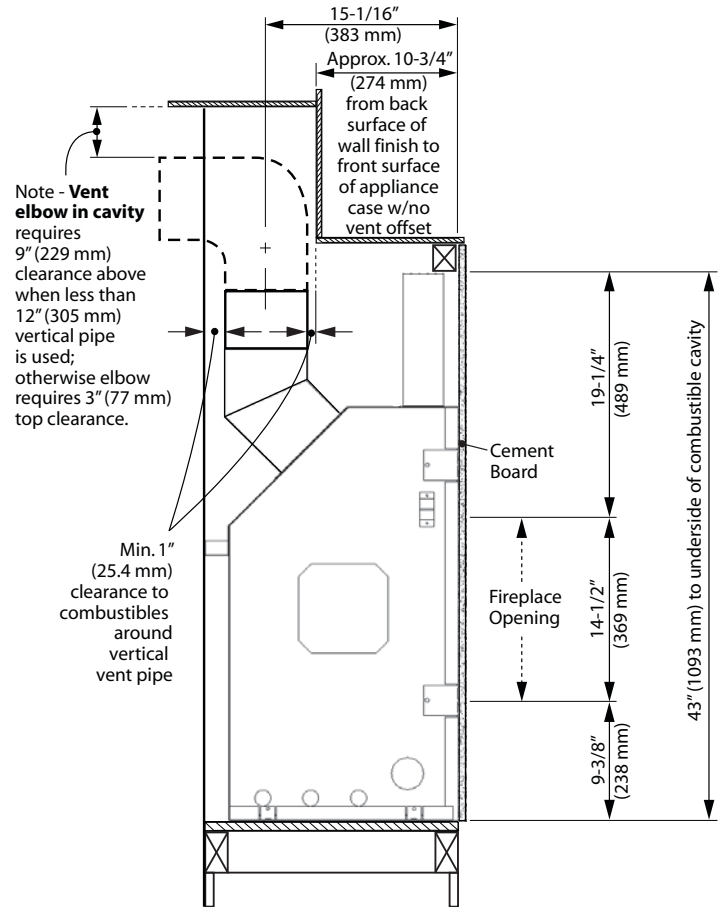

**Framing with Partial Shelf—Top Outlet, vent elbow in cavity**